

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV4355A8

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data <sup>1</sup>						
U <sub>N</sub> [V]	D/Y	f <sub>N</sub> [Hz]	P <sub>N</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [1/min]	T <sub>N</sub> [Nm]
380	Δ	50	280.00	485	2985	896.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P <sub>L</sub> [W]	Relative losses P <sub>L</sub> /P <sub>N</sub> [%]	Voltage [V]
P1 (90/100)	11974	4.28	341
P2 (50/100)	7074	2.53	192
P3 (25/100)	4901	1.75	98
P4 (90/50)	7480	2.67	338
P5 (50/50)	3732	1.33	189
P6 (50/25)	2906	1.04	188
P7 (25/25)	1358	0.48	94

Map of losses - relative losses P<sub>L</sub>/P<sub>N</sub> [%]

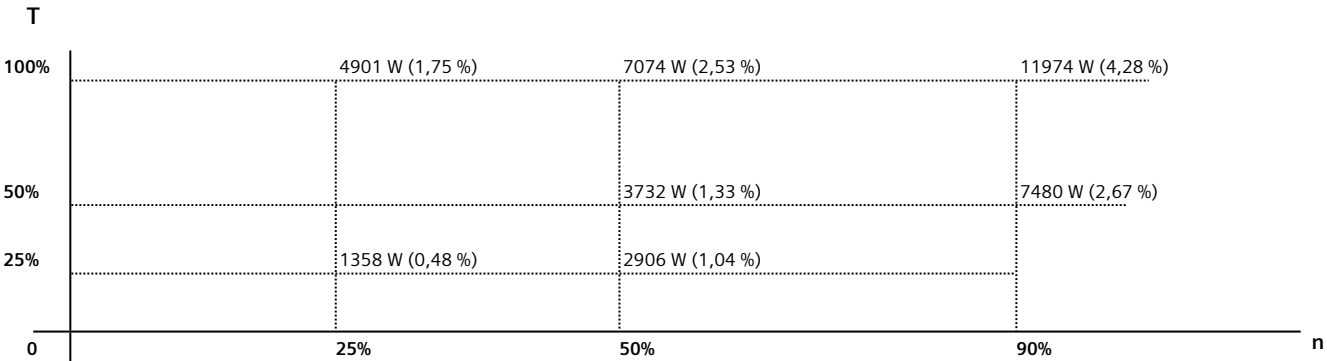


Notes:

T as relative T:  $T/T_N$  [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n:  $n/n_N$  [%]

Responsible department	Technical reference	Created by	Approved by		
IN LVM					
	Document type			Document status	
	Datasheet			Released	
	Document title			Document number	
	1TL8014-3BA53-3AA4-Z				
	D24		Revision	Creation date	Language   Page
© INNOMOTICS 2024			743	2024-11-01 01:33	en   1/1