

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3131A

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	7.50	14.1	2930	24.4

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	837	11.16	362
P2 (50/100)	710	9.47	213
P3 (25/100)	650	8.67	119
P4 (90/50)	343	4.57	350
P5 (50/50)	252	3.36	200
P6 (50/25)	138	1.84	194
P7 (25/25)	99	1.3	100

Map of losses - relative losses P_L/P_N [%]

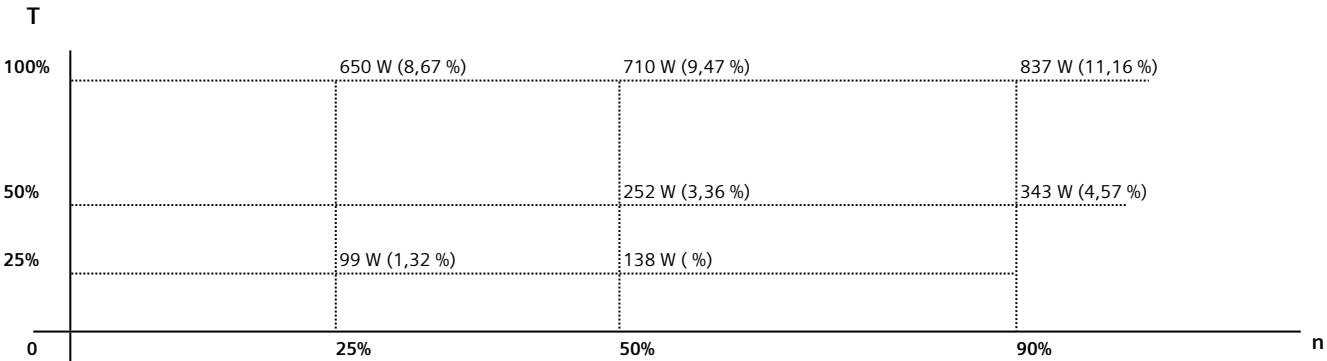


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by		Link documents	
IN LVM						
	Document type	Document status				
	Datasheet	Released				
	Document title	Document number			Language	Page
	1TL0013-1CA13-3AA4-Z					
© INNOMOTICS 2024	W12	Revision	Creation date			
		743	2024-10-31 06:30		en	