

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV3182A


| | | |
|------------------|-----------------|-----------|
| Client order no. | Item-No. | Offer no. |
| Order no. | Consignment no. | Project |

| Remarks |
|---------|
|---------|

| General data ¹ | | | | | | |
|---------------------------|-----|---------------------|---------------------|--------------------|------------------------|---------------------|
| U _N [V] | D/Y | f _N [Hz] | P _N [kW] | I _N [A] | n _N [1/min] | T _N [Nm] |
| 380 | Δ | 50 | 22.00 | 40.5 | 2950 | 71.2 |

| Power losses acc. to COMMISSION REGULATION (EU) 2019/1781 | | | |
|---|------------------|-------------------------------|-------------|
| Operating point | Losses P_L [W] | Relative losses P_L/P_N [%] | Voltage [V] |
| P1 (90/100) | 1664 | 7.56 | 360 |
| P2 (50/100) | 1261 | 5.73 | 207 |
| P3 (25/100) | 1080 | 4.91 | 110 |
| P4 (90/50) | 818 | 3.72 | 353 |
| P5 (50/50) | 516 | 2.35 | 199 |
| P6 (50/25) | 332 | 1.51 | 196 |
| P7 (25/25) | 208 | 0.95 | 100 |

Map of losses - relative losses P_L/P_N [%]

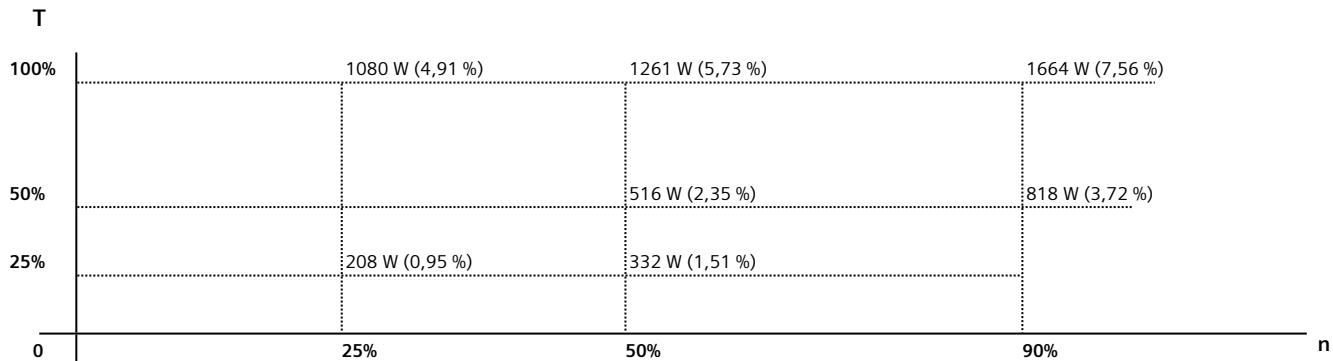


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

| | | | | | | | | |
|--|--|------------|-------------|--|-----------------------------|-----------------------------------|----------------|-------------|
| Responsible department IN LVM | Technical reference | Created by | Approved by | | | | | |
|  | Document type Datasheet | | | | Document status Released | | | |
| | Document title 1TL0013-1EA23-3AA4-Z | | | | Document number | | | |
| © INNOMOTICS 2024 | W12 | | | | Revision 743 | Creation date 2024-10-31 06:52 | Language en | Page 1/1 |