

## Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV3205A


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks
---------

General data <sup>1</sup>						
U <sub>N</sub> [V]	D/Y	f <sub>N</sub> [Hz]	P <sub>N</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [1/min]	T <sub>N</sub> [Nm]
380	Δ	50	37.00	67	2960	119.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P <sub>L</sub> [W]	Relative losses P <sub>L</sub> /P <sub>N</sub> [%]	Voltage [V]
P1 (90/100)	2392	6.46	362
P2 (50/100)	1691	4.57	205
P3 (25/100)	1391	3.76	108
P4 (90/50)	1279	3.46	354
P5 (50/50)	736	1.99	199
P6 (50/25)	500	1.35	197
P7 (25/25)	291	0.79	100

Map of losses - relative losses  $P_L/P_N$  [%]

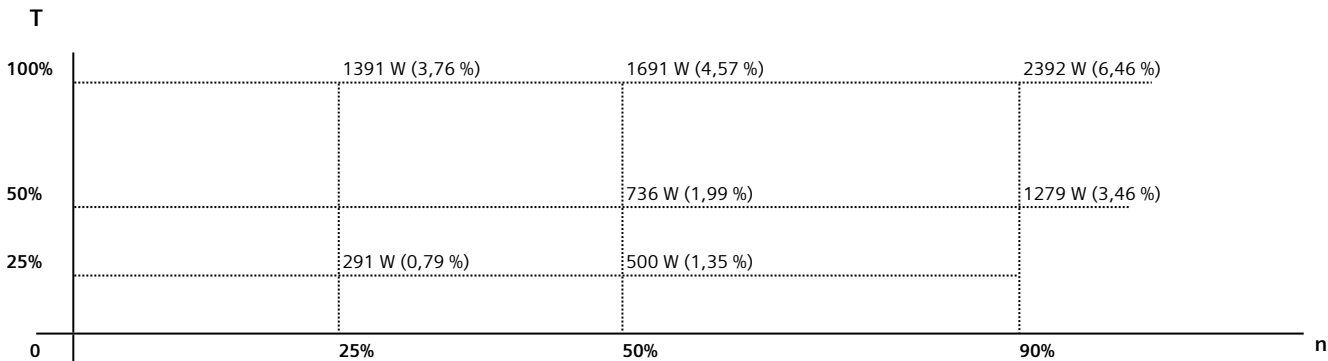


Notes:

T as relative T:  $T/T_N$  [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n:  $n/n_N$  [%]

Responsible department IN LVM	Technical reference	Created by	Approved by				
	Document type Datasheet			Document status Released			
	Document title 1TL0013-2AA53-3AA4-Z			Document number			
© INNOMOTICS 2024	W12			Revision 743	Creation date 2024-10-31 06:52	Language en	Page 1/1