

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV4316A8

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	185.00	330	2982	592.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	7171	3.88	343
P2 (50/100)	4888	2.64	193
P3 (25/100)	3780	2.04	99
P4 (90/50)	3684	1.99	338
P5 (50/50)	2132	1.15	189
P6 (50/25)	1455	0.79	187
P7 (25/25)	772	0.42	94

Map of losses - relative losses P_L/P_N [%]

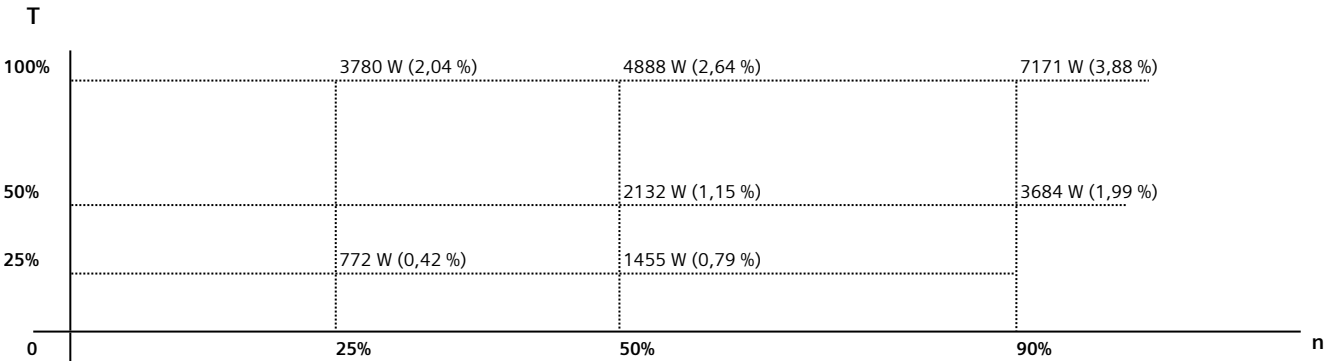


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by					
IN LVM								
	Document type				Document status			
	Datasheet				Released			
	Document title				Document number			
	1TL8014-3AA63-3AA4-Z							
	D24				Revision	Creation date	Language	Page
© INNOMOTICS 2024					743	2024-10-31 07:26	en	1/1