

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV4352B8

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	220.00	395	1490	1410.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	9062	4.12	342
P2 (50/100)	6293	2.86	192
P3 (25/100)	4682	2.13	99
P4 (90/50)	5124	2.33	339
P5 (50/50)	3227	1.47	189
P6 (50/25)	2468	1.12	188
P7 (25/25)	1336	0.61	95

Map of losses - relative losses P_L/P_N [%]

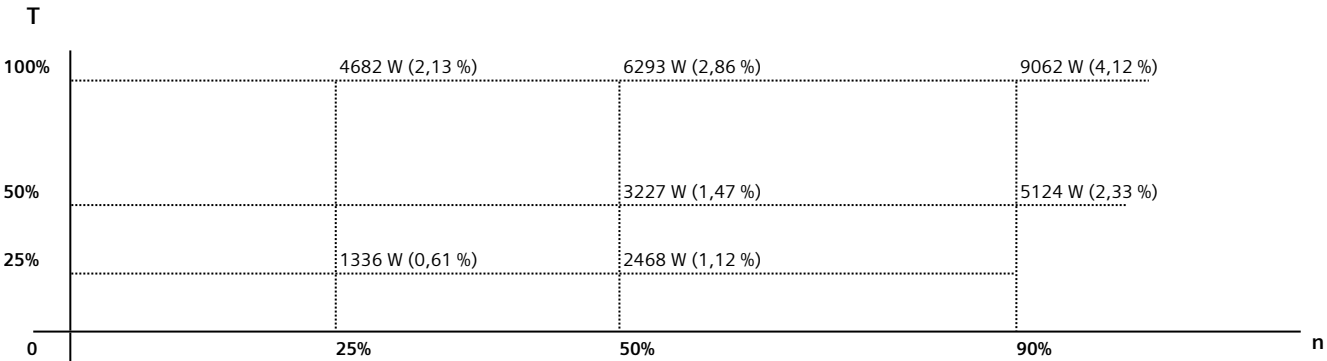


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by		
IN LVM					
	Document type			Document status	
	Datasheet			Released	
	Document title			Document number	
	1TL8014-3BB23-3AA4-Z				
	D24		Revision	Creation date	Language Page
© INNOMOTICS 2024			743	2024-11-01 01:33	en 1/1