

## Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV3130C


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks
---------

General data <sup>1</sup>						
U <sub>N</sub> [V]	D/Y	f <sub>N</sub> [Hz]	P <sub>N</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [1/min]	T <sub>N</sub> [Nm]
380	Y	50	3.00	7.1	965	29.7

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P <sub>L</sub> [W]	Relative losses P <sub>L</sub> /P <sub>N</sub> [%]	Voltage [V]
P1 (90/100)	443	14.77	363
P2 (50/100)	390	13	213
P3 (25/100)	358	11.93	120
P4 (90/50)	212	7.07	347
P5 (50/50)	173	5.77	199
P6 (50/25)	120	4	192
P7 (25/25)	97	3.2	100

Map of losses - relative losses  $P_L/P_N$  [%]

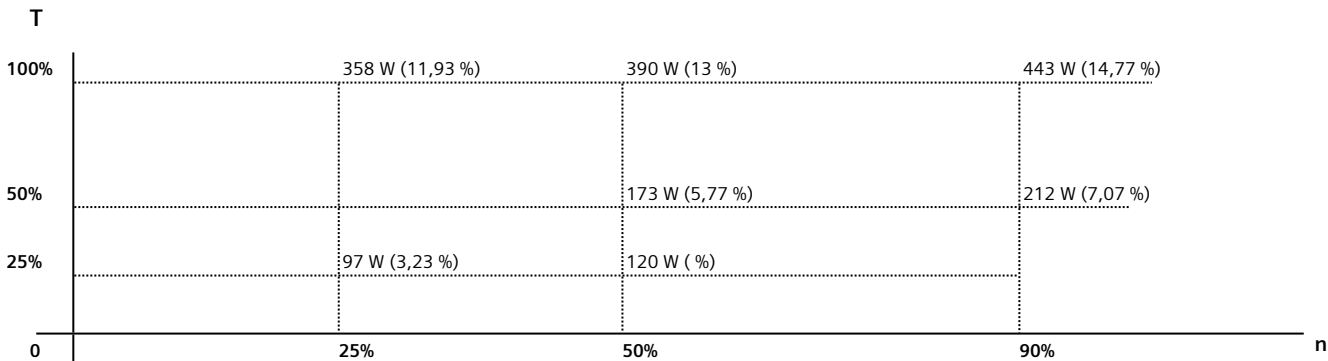


Notes:

T as relative T:  $T/T_N$  [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n:  $n/n_N$  [%]

Responsible department IN LVM	Technical reference	Created by	Approved by				
	Document type Datasheet			Document status Released			
	Document title 1TL0013-1CC02-1AA4-Z			Document number			
© INNOMOTICS 2024	W12		Revision 743	Creation date 2024-10-31 06:48		Language en	Page 1/1