

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3353A

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	250.00	440	2985	800.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	10593	4.24	360
P2 (50/100)	6294	2.52	202
P3 (25/100)	4550	1.82	103
P4 (90/50)	6384	2.55	356
P5 (50/50)	3105	1.24	199
P6 (50/25)	2315	0.93	198
P7 (25/25)	1145	0.46	99

Map of losses - relative losses P_L/P_N [%]

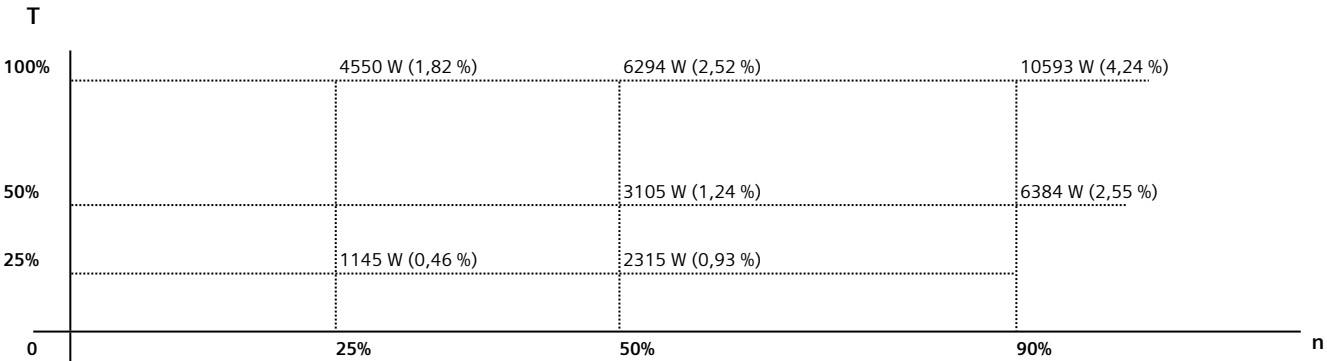


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by					
IN LVM								
	Document type				Document status			
	Datasheet				Released			
	Document title				Document number			
	1TL0013-3BA33-3AA4-Z							
	W12				Revision	Creation date	Language	Page
© INNOMOTICS 2024					743	2024-10-31 06:56	en	1/1